


# geolometer

R O C K   S O L I D L Y   R E L I A B L E

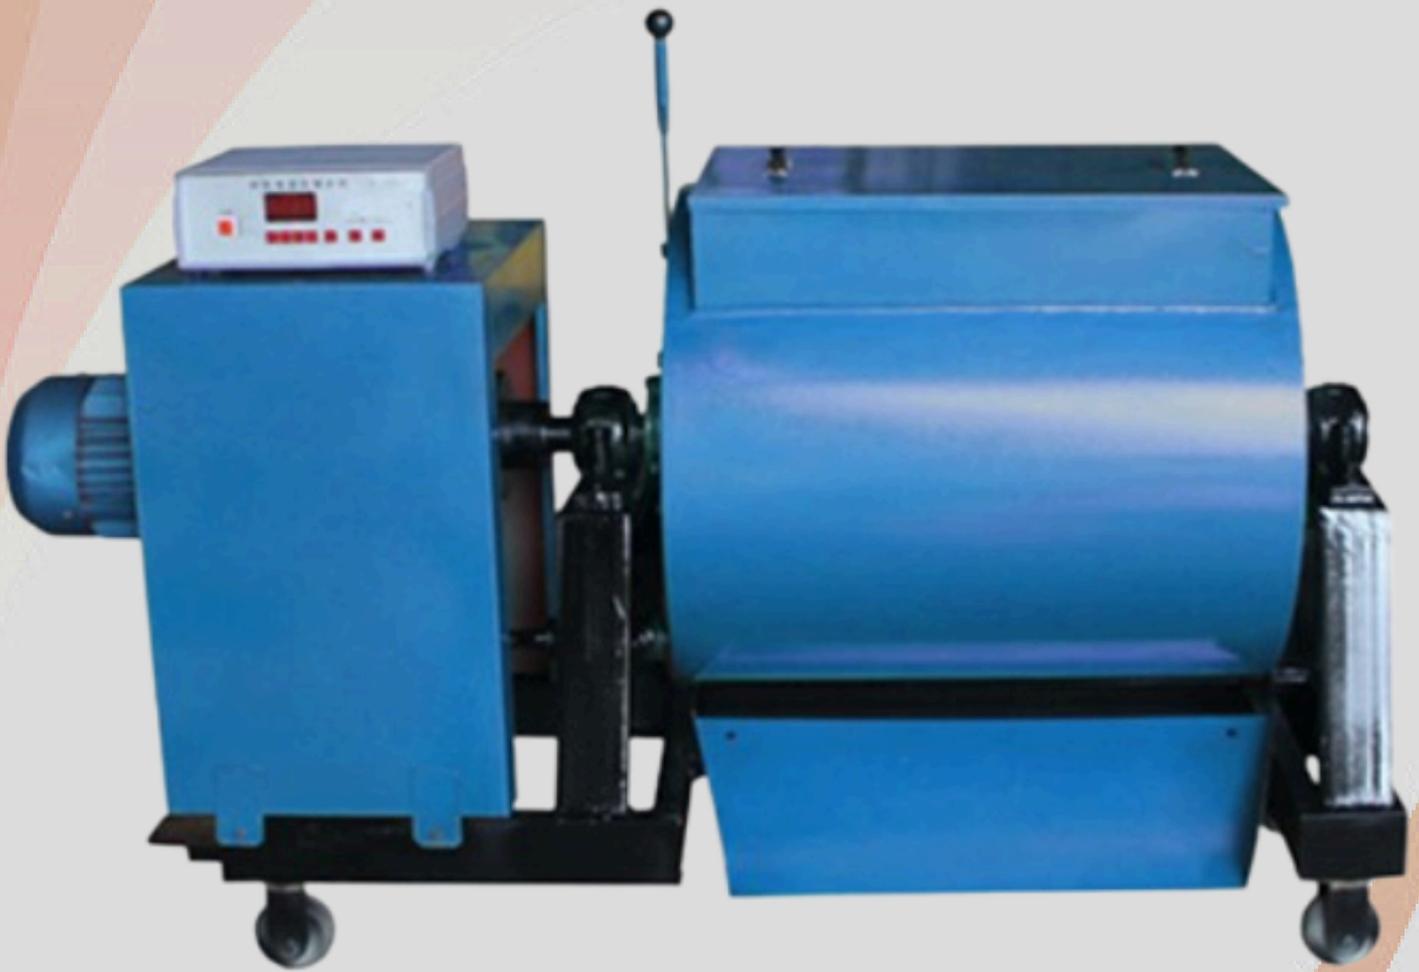

**GL-CC 204**

**Forced single-layer shaft concrete  
mixer**

# PRODUCT APPLICATION

This product has been widely employed by construction businesses, building research units, and concrete component unit laboratories. It works well with plastic, dry hard, light aggregate concrete, and a range of mortars and mortar mixing.

## Product Specifications

SPECIFICATIONS	GL-CC 204 : TYPE 30
Wall Thickness	6 mm
Input Capacity	48 L
Mixing Capacity	30 L
Max Discharge Capacity	33 L
Mixing Time	≤ 45 s
Shaft Speed	47 ± 1 r/min
Motor Power	1.5 kW
Power Supply	AC380V ± 10%, 50Hz
Dimensions (L x W x H)	1130 × 400 × 900 mm
Weight	190 kg

SPECIFICATIONS	GL-CC 204 : TYPE 60
Wall Thickness	6 mm
Input Capacity	96 L
Mixing Capacity	60 L
Max Discharge Capacity	66 L
Mixing Time	≤ 45 s
Shaft Speed	47 ± 1 r/min
Motor Power	2.2 kW
Power Supply	AC380V ± 10%, 50Hz
Dimensions (L x W x H)	1520 × 530 × 1060 mm
Weight	220 kg