


geolometer

ROCK SOLIDLY RELIABLE

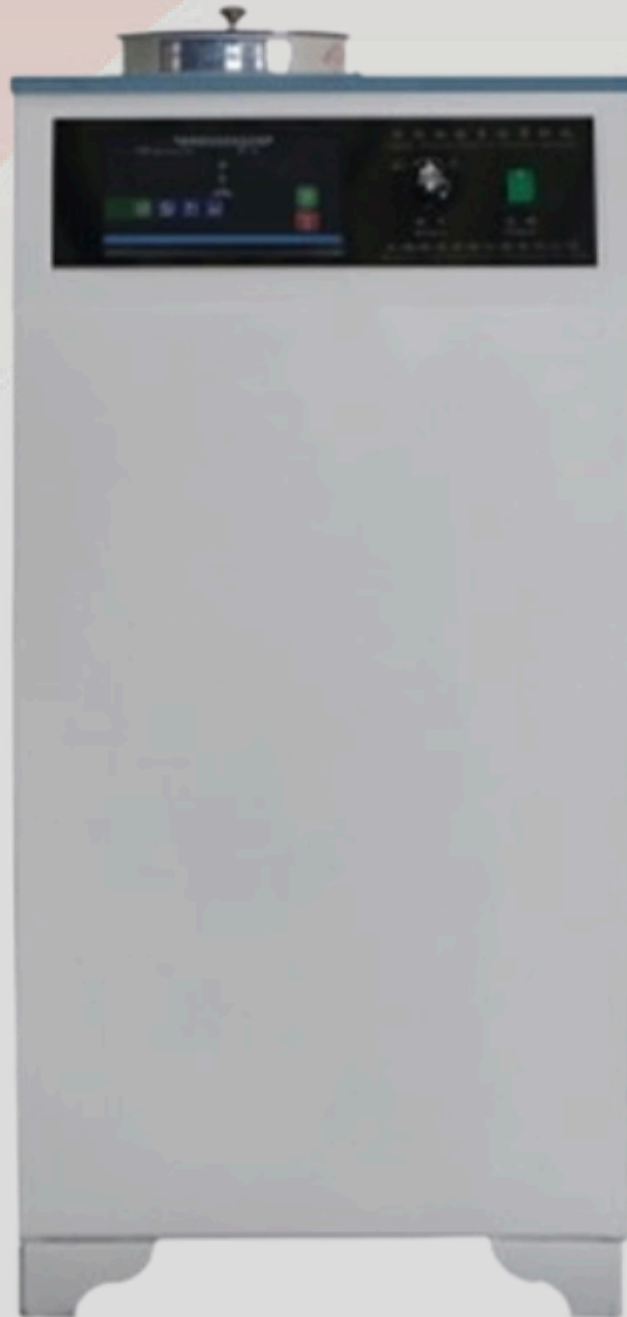

GL-CT 150

**Cement fineness negative
pressure screener**

PRODUCT APPLICATION

This instrument is widely used for cement production control and fineness inspection in cement plants, cement quality inspection stations, and other facilities. Other businesses can also use it to test the fineness of powder.

Product Specifications

SPECIFICATIONS	GL-CT 150
Screening Test Fineness	1 ~ 0.030 mm
Automatic Screening Time	0 ~ 999 s (adjustable)
Working Negative Pressure	-4000 to -6000 Pa
Power Supply	220V ± 10%, 50 Hz
Addition Amount	10 to 25 g
Dimensions (L x W x H)	450 × 380 × 830 mm
Weight	30 kg
Noise Level	≤ 75 dB